

# Auxiliary Seal Support Reservoirs

Liquid lubricated, dual mechanical seals require an external source of fluid. A properly selected supply tank system eliminates the need to connect to a distant and sometimes unreliable barrier fluid source. Flowserve offers a complete line of standard reservoirs for a wide range of sealing applications and custom designed supply tank systems based on your specifications.

**For Plan 52 & 53 Piping Arrangements**

### API 610

Heavy duty 950 psi tank for all-around high pressure services. Carbon steel and 304 stainless steel in two and four gallon usable capacity.

### ANSI 400

400 psi tank for all-around medium pressure services. Carbon steel and 304 stainless steel in two and four gallon usable capacity.

### API 682


Built to specifically meet API 682 requirements. 316 stainless steel five gallon usable capacity.

Standard piping arrangements on all Flowserve supply tanks conform to API Plan 52 & 53 or ANSI Plan 7352 & 7353

### ANSI Lite

Economical light duty 150 psi tank for general service applications. Carbon steel and 304 stainless construction in a 3 gallon usable capacity.

**Barrier System Available Features**

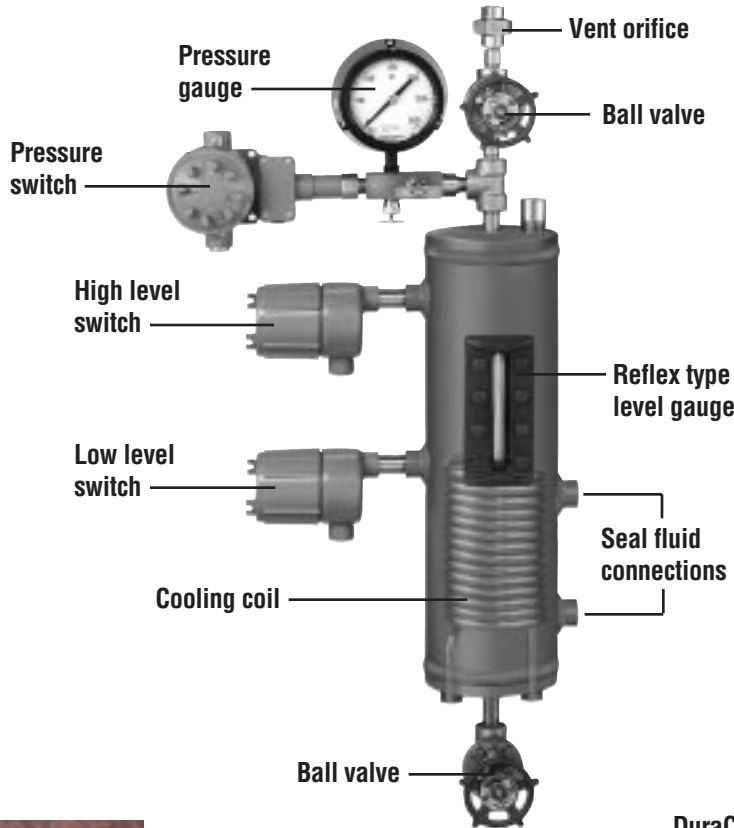

An advantage of a closed-loop supply tank system is its ability to indicate the condition of inner seal leakage based on the fluid level measurements over a set period of time. Optional level monitoring devices are available for early detection of either high or low liquid levels and pending seal failure.



**Refill cart**

Refill your supply tanks in operation without pump downtime or venting unwanted gases to atmosphere. Capable of injecting new barrier fluid into the supply tank at pressures up to 1500 psi.

**DuraClear barrier fluids**

Pure synthetics and blends are available for all dual and tandem mechanical seal applications. These nontoxic, food-grade barrier fluids are compatible with virtually all process fluids and will greatly reduce energy consumption and increase the mean time between planned maintenance of your pump or mixer. Request form FSD123 for information on the complete line of DuraClear products.

The information and specifications presented in this product brochure are believed to be accurate, but are supplied for information purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, with respect to the product. Although Flowserve Corporation can provide general application guidelines, it cannot provide specific information for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper selection, installation, operation and maintenance of Flowserve products. Because Flowserve Corporation is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice.

**Primary Worldwide Flow Solutions Division Locations**

*Licensees, authorized agents, and affiliated companies located worldwide.*

<p><b>United States</b></p> <p>Kalamazoo, MI                  Phone 616-381-2650                  Fax 616-381-8368</p>		<p><b>Canada</b></p> <p>Edmonton, Alberta                  Phone 708-463-7958                  Fax 708-450-1241</p>		<p><b>Netherlands</b></p> <p>Roosendaal                  Phone 31-165-581-400                  Fax 31-165-552-622</p>		<p><b>Argentina</b></p> <p>Mendoza                  Phone 54-261-427-2300                  Fax 54-261-427-2524</p>	
<p><b>Singapore</b></p> <p>Phone 65-746-4318                  Fax 65-747-1963</p>		<p><b>Mexico</b></p> <p>Tlaxcala                  Phone 52-2-461-6791                  Fax 52-2-461-6847</p>		<p><b>Brazil</b></p> <p>Sao Paulo                  Phone 55-11-4066-8600                  Fax 55-11-4066-7014</p>		<p><b>Japan</b></p> <p>Osaka                  Phone 81-720-85-5571                  Fax 81-720-85-5575</p>	
		<p><b>Germany</b></p> <p>Dortmund                  Phone 49-231-6964-0                  Fax 49-231-6964-248</p>		<p><b>Australia</b></p> <p>Marayong NSW                  Phone 61-2-8822-7100                  Fax 61-2-9679-7511</p>			