

Scienco PH6 Panther

Diaphragm Transfer Pump



Powerful and Versatile

The PH6 Panther diaphragm transfer pump is engineered for use with low and high viscosity fluids. Designed to fit virtually any container, the PH6 is the standard for many ag-chem mini-bulk systems. Capable of generating a maximum pressure of 1.7 bar (25 psi), it is able to pump viscous chemicals even on the coldest mornings. Its 12-volt motor is engineered to produce a flow rate of 30 to 38 l/m (8 to 10 gpm) at 16°C (60°F) with a 30-minute duty cycle. For application flexibility, the PH6 may be vertically or horizontally mounted.

Operating Parameters

- Flows to 38 l/m (10 gpm)
- Heads to 3.6 m (12 ft)
- Pressures to 1.7 bar (25 psi)
- Temperatures to 55°C (130°F)
- Viscosities to 2500 cP (11 600 ssu)

Applications

- Chemical transfer
- Non-flammable liquids
- Light oils
- Inks
- Automotive fluids
- Agriculture

Features and Benefits

Removable Cartridge containing diaphragm, valves and bypass assembly simplifies maintenance and field replacement

Multiple Pump-Chamber Design increases pump dependability and availability

Chemically Resistant, Non-Metallic Construction prolongs pump life. Nylon® pump housing and EPDM seals standard. Polypropylene housing and Viton® seals available. Diaphragm design is able to pump high or low viscosity fluids

Vertical or Horizontal Container Top Mount provides application flexibility

50 mm (2 in) Suction Port is adaptable to most container fittings or a camlock fitting. A 25 mm (1 in) reducer is available

Optional SPAN Cap fits tanks with 190.5 mm (7.5 in) male threaded openings. It is available in no recirculation, auto-recirculation and manual recirculation designs

Materials of Construction

Component	Standard Material	Optional Material
Casing	Glass-filled nylon	Glass-filled polypropylene
Cartridge housing	Polyphenylene sulfide (PPS)	
Valves	Stainless steel	Epoxy
O-rings	EPDM	Viton®, Buna-N®
Diaphragm	Santoprene®	


Note: Ensure chemical compatibility between the liquid pumped and the wetted pump components prior to use.

® Nylon and Viton are registered trademarks of DuPont Dow Elastomers, LLC.

® Buna-N is a registered trademark of the DuPont Company.

® Santoprene is a registered trademark of the Monasanto Company.

Pressure vs. Flow (water @ 70° F)

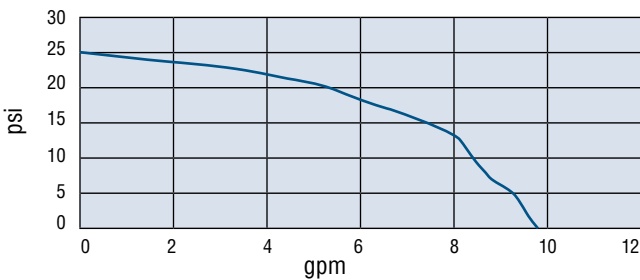

Available Equipment and Accessories

The PH6 Panther pump is available in multiple configurations, each with varying equipment and accessories. Dip tubes, bung adapters, male and female camlocks, ball valves and spouts, SPAN caps and discharge hoses are available.

Refer to the Scienco Product Support Catalog (P-70-100) to learn more about the available configurations.

Portable PH6 CADDY System

With its lightweight tubular frame, the PH6 CADDY System provides maximum portability and ease of handling for users of multiple containers.

The PH6 CADDY System includes: the tubular frame; the PH6 pump with 12-volt motor; an SEM-10 flow meter; a ball valve and spout; and two 25 mm (1 in) EPDM hoses. Other configurations are available and may include the SEM-10SS flow meter or the 110-volt motor.



PH6 CADDY System with SEM-10 Flow Meter

Reliability Guaranteed by 5-Year Service Program

Scienco's standard-duty PH6 Panther pumps, PH6 CADDY Systems and pump-mounted SEM-10 flow meters are backed by its industry-leading 5-Year Service Program. Through this program, Scienco pump users will spend less money and time on chemical transfer equipment than ever before.



For additional information about Scienco pumps or Scienco's 5-Year Service Program, please call 800 343 PUMP (7867).

Bulletin PSS-90-20.4d (E/A4) Printed in USA. August 2008.

© Flowserve Corporation

To find your local Flowserve representative:

For more information about Flowserve Corporation, visit www.flowserve.com or call USA 1 800 728 PUMP (7867)

USA and Canada

Flowserve Corporation
5215 North O'Connor Blvd.
Suite 2300
Irving, Texas 75039-5421 USA
Telephone: 1 937 890 5839

Flowserve Corporation

Scienco Pumps
5599 E. Holmes Road
Memphis, Tennessee 38118 USA
Telephone: 1 800 343 7867
Telefax: 1 901 259 3946

Europe, Middle East, Africa

Flowserve Corporation
Gebouw Hagepoint
Westbroek 39-51
4822 ZX Breda
Netherlands
Telephone: (31) 76 502 8920

Latin America

Flowserve Corporation
Boulevard del Cafetal
Edificio Ninina, Local 7
El Cafetal - Caracas
Venezuela 1061
Telephone: 58 212 985 3092
Telefax: 58 212 985 1007