

BRC Series High temperature metal bellows seals

BRC Series edge-welded metal bellows seals are exceptionally robust and designed to seal high-temperature hydrocarbons, heat transfer fluids and severe services in refineries and hydrocarbon processing plants. The BRC series is fully compliant with API 682/ISO 21039 Type C requirements and features thick-plate Alloy 718 bellows convolutions for superior corrosion resistance.



Features and Benefits

- Rugged construction throughout makes BRC seals the toughest and most reliable metal bellows mechanical seals for difficult refinery pump services.
- Bellows diaphragm thicknesses start at 0.010 in. (0.25 mm) on small sizes and extend to 0.012 in. (0.30 mm) for the industry's strongest bellows, capable of long-term chemical exposure and low-stress performance.
- Alloy 718 bellows and end adapters satisfy NACE MR0103 and have the highest resistance to stress corrosion cracking in sulfuric-laced environments at high temperature.
- Mounted in a flexible graphite ring to avoid shrink-fit distortions, the silicon carbide rotating face sustains a stable, flat sealing surface for reliable, low-leakage performance.
- Seal face combinations of carbon against silicon carbide or carbide against carbide are matched with the service conditions from heavy hydrocarbons to light products including some solids.
- Configurable with rotating or stationary bellows, BRC seals include a steam purge baffle under the stationary components to eliminate coking and prolong clean operation.


Operating Parameters

Pressure	Up to 300 psi (20.7 bar)
Temperature	-100°F to 800°F (-73°C to 427°C)
Specific Gravity	0.45 and higher
Surface Speed	Up to 75 ft/sec (23 m/sec)
Shaft Sizes	0.983 to 6.000 inches (25 to 152.4 mm)


Materials of Construction

Bellows Assembly	Alloy 718 / 316 Stainless Steel or Alloy 718
Rotating Face	Silicon Carbide
Stationary Face	Carbon or Silicon Carbide
Gaskets	Flexible Graphite
Metal Parts	316 Stainless Steel or Alloy 718

BRC Seal
Standard design
with threaded
bellows adapter

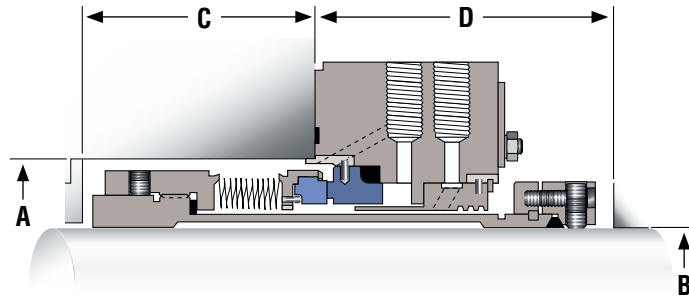

BRCH Seal
Optional design
with bolted
bellows adapter

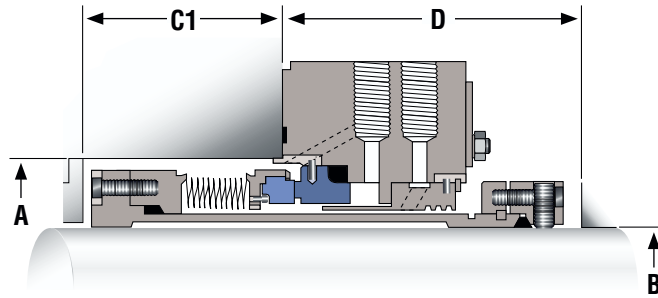

Dimensional Data inches

Seal Size	A Min	B Max	C Min	C1 Min	D Min
1680	2.449	0.983	2.281	1.969	3.469
1812	2.668	1.108	2.625	2.313	3.563
2027	2.887	1.170	2.688	2.376	3.688
2125	2.950	1.358	2.688	2.376	3.688
2250	3.137	1.420	2.875	2.563	3.688
2375	3.137	1.545	2.531	2.219	3.719
2500	3.316	1.670	2.844	2.532	3.688
2687	3.559	1.795	2.844	2.532	3.781
2750	3.575	1.983	2.781	2.469	3.844
3000	3.952	2.170	3.125	2.813	4.063
3250	4.200	2.420	3.125	2.813	4.063
3500	4.481	2.670	3.125	2.813	4.063
3750	4.699	2.920	3.188	2.876	4.063
4000	5.028	3.108	3.594	3.282	4.063
4250	5.342	3.358	3.375	3.063	4.063
4812	5.875	3.858	3.563	3.251	4.063
5500	6.803	4.483	3.563	3.251	4.156
6750	7.875	6.000	3.625	3.313	3.125

millimeters

Seal Size	A Min	B Max	C Min	C1 Min	D Min
1680	62.2	25.0	57.9	50.0	88.1
1812	67.8	28.1	66.7	58.7	90.5
2027	73.3	29.7	68.3	60.3	93.7
2125	74.9	34.5	68.3	60.3	93.7
2250	79.7	36.1	73.0	65.1	93.7
2375	79.7	39.2	64.3	56.3	94.5
2500	84.2	42.4	72.2	64.3	93.7
2687	90.4	45.6	72.2	64.3	96.0
2750	90.8	50.4	70.6	62.7	97.6
3000	100.4	55.1	79.4	71.4	103.2
3250	106.7	61.5	79.4	71.4	103.2
3500	113.8	67.8	79.4	71.4	103.2
3750	119.4	74.2	81.0	73.0	103.2
4000	127.7	78.9	91.3	83.4	103.2
4250	135.7	85.3	85.7	77.8	103.2
4812	149.2	98.0	90.5	82.6	103.2
5500	172.8	113.9	90.5	82.6	105.6
6750	200.0	152.4	92.1	84.1	79.4

FSD142eng REV 11/08 Printed in USA

To find your local Flowserve representative
and find out more about Flowserve Corporation visit
www.flowserve.com

USA and Canada
Kalamazoo, Michigan USA
Telephone: 1 269 381 2650
Telefax: 1 269 382 8726

Europe, Middle East, Africa
Essen, Germany
Telephone: 49 201 31937-0
Telefax: 49 201 2200-561

Asia Pacific
Singapore
Telephone: 65 6544 6800
Telefax: 65 6214 0541

Latin America
Mexico City
Telephone: 52 55 5567 7170
Telefax: 52 55 5567 4224

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.