



***Lawrence Pumps® HED6400
Fully Lined Between Bearings, Radially
Split, Two-Stage, Slurry Pump***

ISO 13709/API 610 (BB2)




Experience In Motion

Lawrence Pumps HED6400

Fully Lined Between Bearings,
Two-Stage, Radially Split
Slurry Pump

ISO 13709/API 610 (BB2)

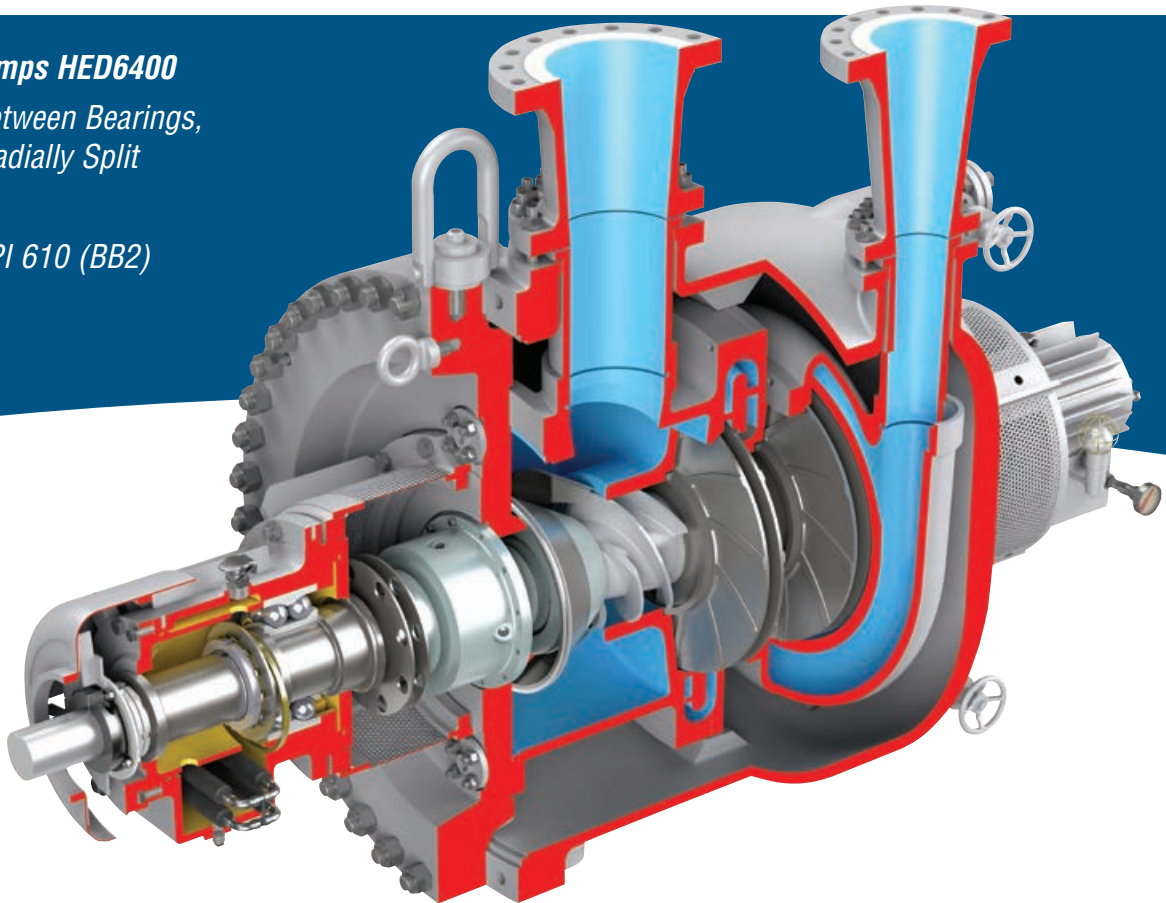

Safety and Performance in Heavy Oils Processing

Processing heavy oils and synthetic fuels requires pumps capable of withstanding high-velocity abrasive slurries at high process temperatures. By using the “pump within a pump” concept, the HED6400 can do just that.

Compliant with ISO 13709/API 610 (BB2), the HED6400 is a true slurry pump. The pressure casing of the HED6400 is completely protected from erosion and abrasion by replaceable liners. This design greatly extends the useful life of the pressure casing and eliminates a safety hazard inherent to all standard unlined, partially lined or coated pumps. As a result, the HED6400 is able to reliably and safely handle abrasive solids at elevated temperatures without the danger of pressure casing failure.

Features and Benefits

Fully Replaceable, Mechanically Fastened Casing Liners protect the pressure casing, including all penetrations, from erosion and abrasion.

- Liners may be economically replaced or machined to re-establish proper operating clearances and restore pump efficiency.
- Liners are available in several abrasion-resistant materials to meet process requirements.

Pressure Casings are available in a variety of materials, including carbon steel and austenitic, duplex and martensitic stainless steels.

Heavy-walled sections extend component life beyond that of standard ISO/API pumps.

Flanges can be machined to most client specifications.

Repelling Vanes on the front and back impeller shrouds minimize recirculation, aid in balancing axial thrust and do not require external flushing.

Inducers are available for low-NPSHA applications. An upgraded rotor is utilized to manage the additional loads on the shaft.



Guaranteed to Not Wear Out

In the HED6400, the high-velocity fluid is contained within renewable hard metal liners. At no time is the pressure casing exposed to erosion or abrasion from the fluid. The pressure casing in a typical ISO/API pump is completely exposed to erosive and/or abrasive wear that can quickly compromise safety and result in expensive, unplanned repairs.

Flowsolve can offer a lifetime warranty* for the HED6400 ISO/API fully lined slurry pump pressure casings against erosive/abrasive wear-through.

Low Total Cost of Ownership

Available in several abrasion-resistant materials, HED6400 impellers and casing liners are designed to last more than three times longer than standard ISO/API pumps with coated parts in similar services. In addition, the cost of replacing or re-machining casing liners is a fraction of the cost of replacing or repairing an ISO/API coated pump pressure casing. Extended operational cycles combined with reduced maintenance costs translates into low total cost of ownership.

Adaptable Hydraulics Provide Process Flexibility

The hydraulic performance of the HED6400 may be altered by changing the casing liner and impeller. This flexibility enables plant operators to adapt pump performance to changing process conditions or operating requirements. Changes may be completed without modifying the pump foundation and piping, keeping associated implementation costs low.

Oversized Bearing Frame for Extended Pump Life

The HPX6000 utilizes a rigid, oversized bearing frame to control shaft deflection. During process upset conditions, the stiff rotor design maintains shaft deflection below ISO/API requirements, helping ensure long mechanical seal life.


Standard antifriction or optional hydrodynamic bearings provide an L_{10} life in excess of 100 000 hours at rated flow conditions, providing the durability required for extended operating life.

Operating Parameters

- Flows to 3409 m³/h (15 000 gpm)
- Heads to 488 m (1600 ft)
- Pressures to 83 bar (1200 psig)
- Speeds to 3600 rpm



*Subject to terms and conditions; please inquire for details.

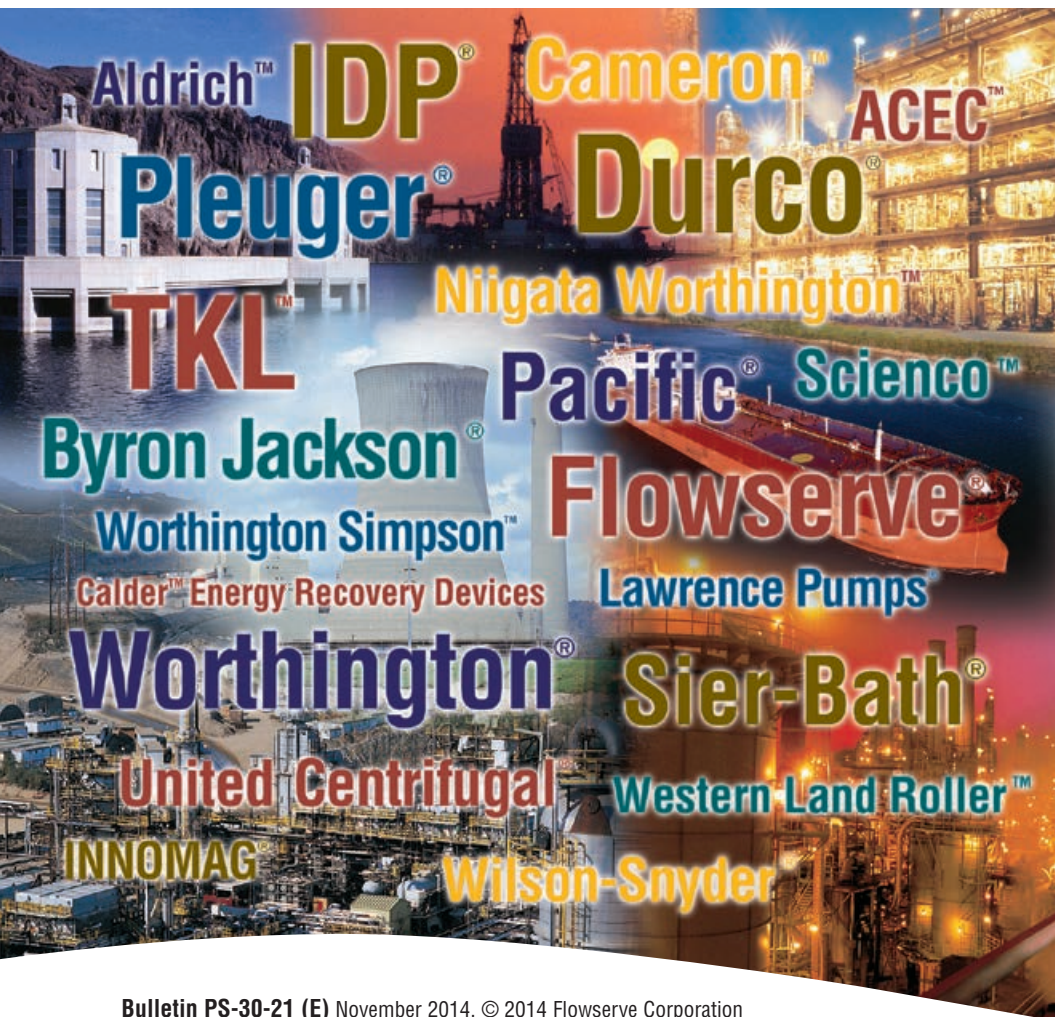

USA and Canada

Flowserve Corporation
5215 North O'Connor Blvd.
Suite 2300
Irving, Texas 75039-5421 USA
Telephone: +1 937 890 5839

Europe, Middle East, Africa

Flowserve Corporation
Parallelweg 13
4878 AH Etten-Leur
The Netherlands
Telephone: +31 76 502 8100

Latin America

Flowserve Corporation
Martín Rodríguez 4460
B1644CGN-Victoria-San Fernando
Buenos Aires, Argentina
Telephone: +54 11 4006 8700
Telefax: +54 11 4714 1610

Asia Pacific

Flowserve Pte. Ltd.
10 Tuas Loop
Singapore 637345
Telephone: +65 6771 0600
Telefax: +65 6862 2329

Bulletin PS-30-21 (E) November 2014. © 2014 Flowserve Corporation

To find your local Flowserve representative:

For more information about Flowserve Corporation,
visit www.flowserve.com or call +1 937 890 5839.