



INNOMAG[®] U-MAG[™]


Fluoropolymer-lined, Magnetic Drive Pump



Experience In Motion

Performance, versatility and value

The INNOMAG U-MAG fluoropolymer-lined, magnetic drive pump has been specifically designed to provide outstanding performance and low total cost of ownership in smaller volume pumping applications in a wide variety of industries. This versatile, compact pump offers outstanding leakage protection for compliance with environmental regulations or “clean floor” initiatives. An available high-purity configuration makes it ideal for applications demanding the strictest purity requirements. Dependable and easy to maintain, the U-MAG will deliver years of reliable, cost-effective service.

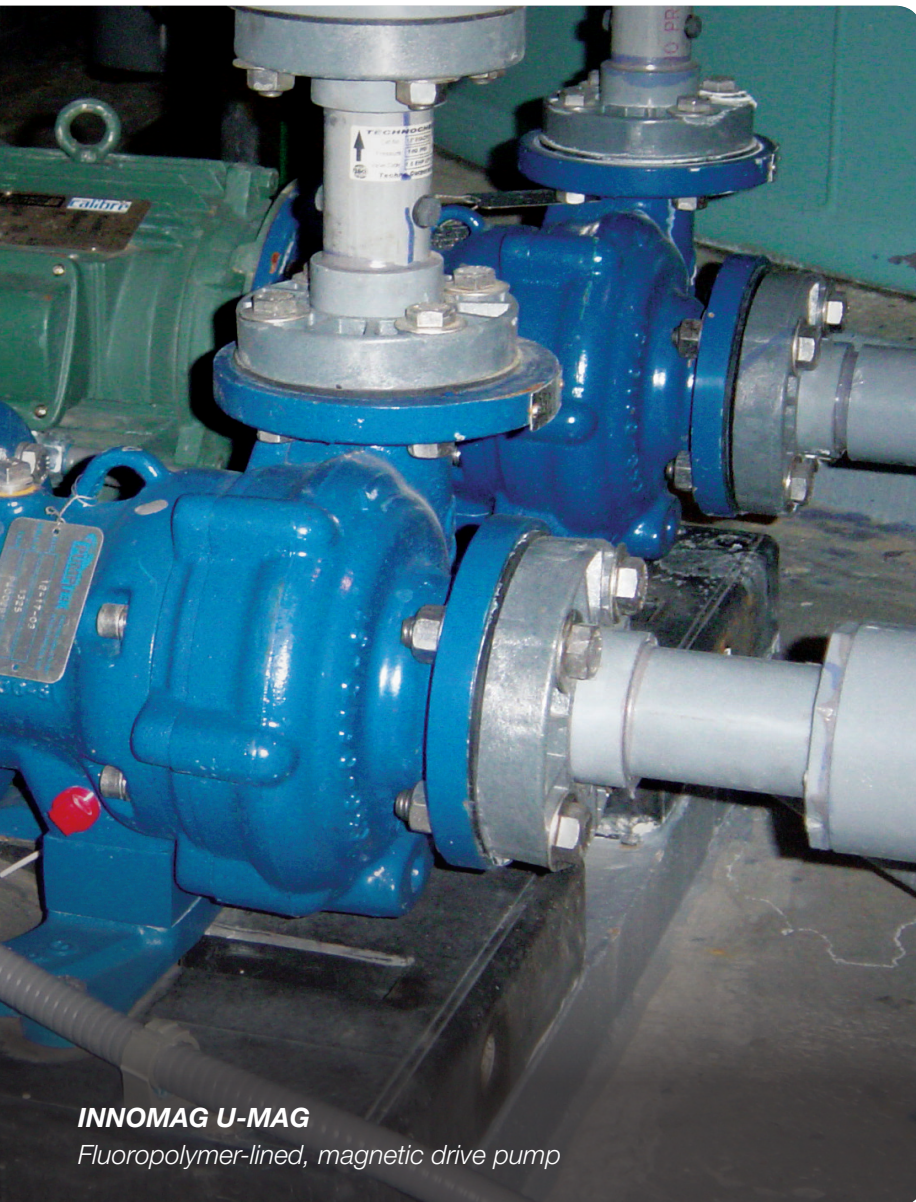

INNOMAG U-MAG
Fluoropolymer-lined, magnetic drive pump

Adaptable by design

The U-MAG easily adapts to a broad range of applications:

- ETFE or optional ultra-high purity PFA construction offers excellent chemical resistance.
- Universal flange design conveniently integrates with existing ISO, ASME and JIS piping connections.
- Numerous mounting and drive options accommodate site-specific requirements. Options include gasoline engines for portable and remote chemical transfer, trunk unloading, skid or cart operation.

Standards compliance

The U-MAG is CE marked and compliant with applicable directives such as ATEX.

Typical applications

- Ultra-high purity manufacturing
 - Semiconductor
 - LCD
 - Circuit board
- Pure water (reverse osmosis and deionized)
- Pharmaceuticals manufacturing
- Chemical processing
- Metal plating
- Parts washing
- Photo processing
- Food processing
- Gas scrubbing
- Heating and cooling


Operating parameters

- Flows to 102 m³/h (450 gpm)
- Heads to 50 m (165 ft)
- Pressures to 17 bar (250 psi)
- Temperatures from -29°C to 121°C (-20°F to 250°F)
- Power range from 0.75 to 10.5 kW (1 to 14 hp)

Five sizes

- U0: 1.5 x 1 x 5 (40 x 25 x 127)
- UL: 1.5 x 1 x 5LF (40 x 25 x 127)
- U1: 2 x 1.5 x 6 (50 x 40 x 152)
- U3: 3 x 2.5 x 6 (80 x 65 x 152)
- U4: 2.5 x 2 x 6 (65 x 50 x 152)



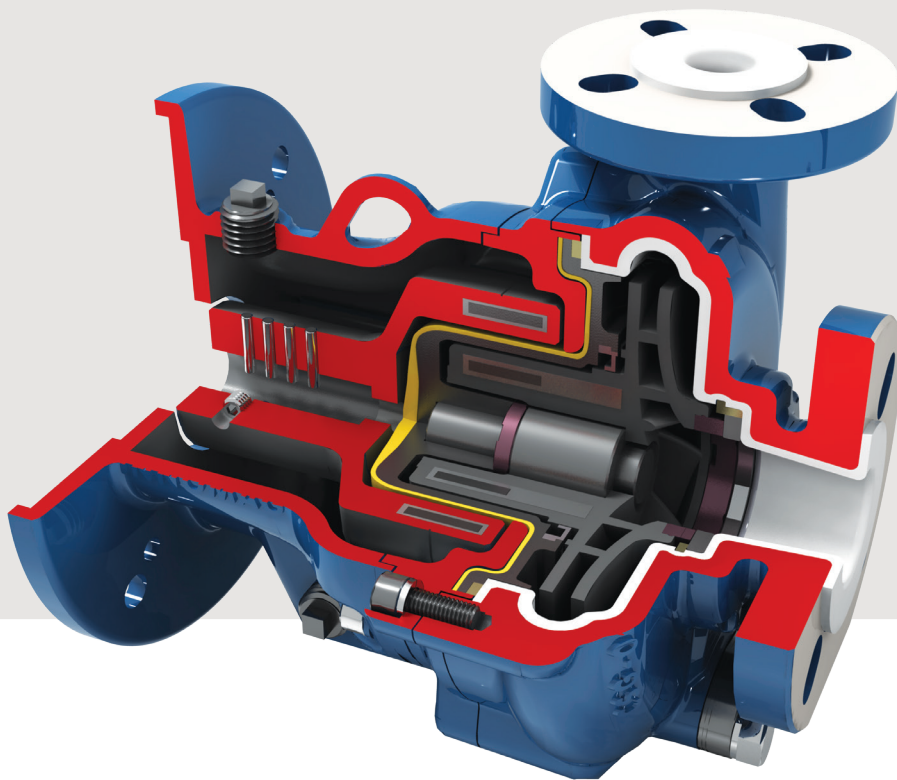

The INNOMAG U-MAG fluoropolymer-lined, magnetic drive pump provides exceptional safety, performance and value in general purpose chemical process and ultra-high purity applications.

Features and benefits

Pure ETFE or PFA casing liner is rotationally molded and vacuum rated. Liner has a minimum thickness of 3 mm (0.125 in).

Universal flanges accommodate ASME (ANSI), ISO and JIS piping connections. Other flange designs available.

One-piece impeller and inner magnet assembly ensures maximum torque transmission, simplifies maintenance and eliminates balancing. Enclosed impeller with unobstructed eye delivers high efficiency and low NPSHR. Injection molded from carbon fiber-reinforced ETFE or ultra-high purity PFA.

Double-sealed inner magnets offer unmatched resistance to corrosive permeation by sheathing the magnets in 316L stainless steel before they are injection molded into the impeller assembly.

Powerful neodymium iron boron (NdFeB) magnets maximize torque transmission.

One-piece composite containment shell consists of aramid and carbon fiber-reinforced ETFE (or PFA) for optimal leak protection, strength and corrosion resistance. Composite construction has zero eddy current losses for maximum efficiency.

Particulate control ring prevents solids from damaging the containment shell and radial bearings.

Sintered silicon carbide pump shaft is oversized to handle all radial loads. Stationary cantilevered design eliminates suction-blocking shaft supports to maximize flow and minimize NPSHR.

Radial bearing is process lubricated and highly reliable. Graphite or silicon carbide are available.


Parts interchangeability among the available sizes reduces inventory costs and eases maintenance.

Motor adapter with universal foot mates directly to a wide range of standard NEMA and IEC C-Face motors. No alignment is required.

Ultra-high purity construction

For applications demanding the highest purity standards, such as semiconductor, circuit board and LCD manufacturing, the INNOMAG U-MAG may be specified in a high-purity configuration. For these applications, wetted components are made from ultra-high purity PFA or silicon carbide.

Refer to the materials chart on page 7 for more detailed information.

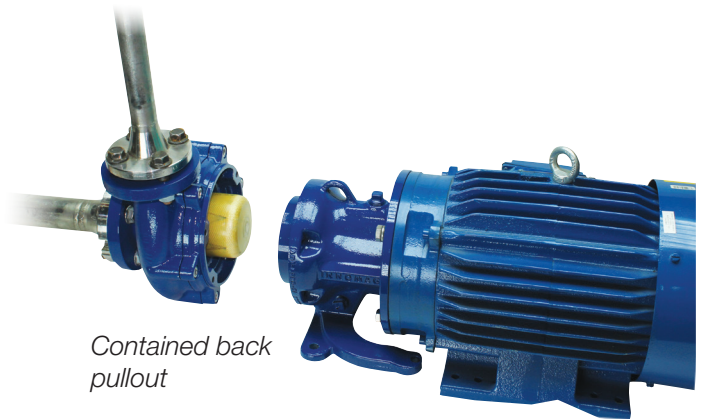

Contained back pullout



Optional ultra-high purity PFA construction




Trouble-free maintenance

The U-MAG offers many features designed to expedite maintenance and reduce total cost of ownership:

- Standard back pullout eases general maintenance and inspection. The casing stays in-line and the piping connections remain intact.
- Contained back pullout (shown) simplifies drive end maintenance. The process fluid remains fully confined, thereby eliminating the need to drain or purge the pump. Maintenance personnel are kept safe from potentially harmful process fluids.
- Fully assembled replacement kits are available for all major components, including: casings, impeller assemblies and containment shells.
- Wear parts, including all rotating and stationary wear rings and thrust collars, are 100% replaceable.
- All mating and exposed metal surfaces are coated in a premium epoxy/epoxy polyamide primer and an aliphatic acrylic polyurethane top coat.

Options and technical data


Available baseplates

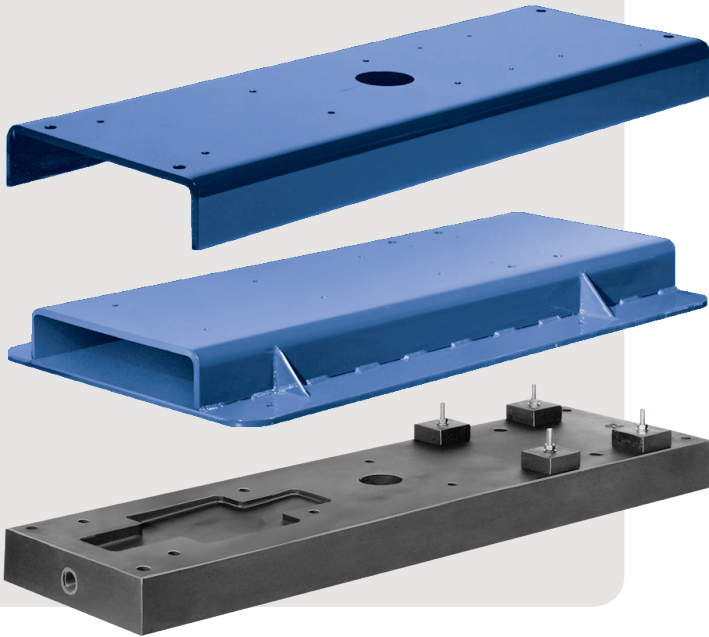

Available baseplates

A range of baseplates is available to meet application requirements with regards to rigidity, vibration dampening, corrosion resistance, etc.

- Standard foundation mounted C-channel
- Foundation or stilt mounted reinforced C-channel
- Foundation or stilt mounted polymer concrete

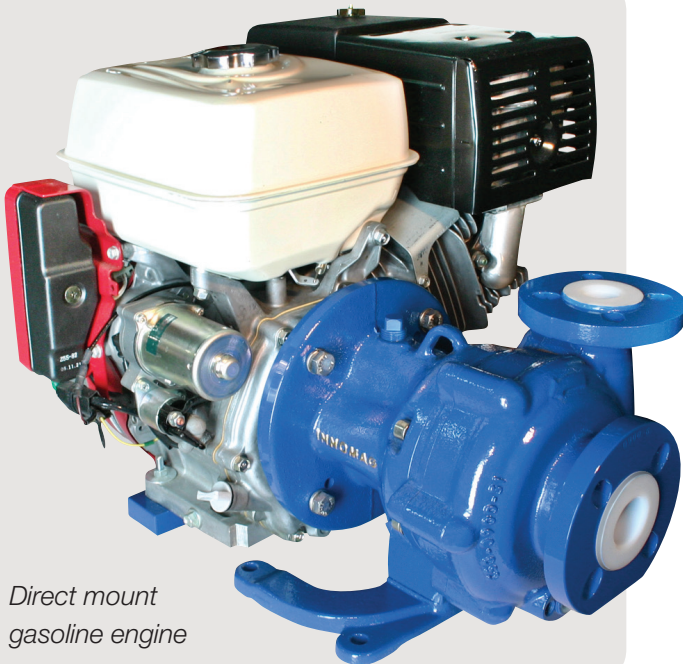

Direct mount gasoline engine

Additional options and accessories


- Direct-mount gasoline engines for tanker trucks and remote locations (shown)
- Low-flow models
- Power monitors and temperature probes
- Priming tanks and systems
- Lined specialty pipe and spool pieces

Materials of construction

Component	Standard	Optional
Casing (armor/liner)	Ductile iron/ETFE	Ductile iron/PFA
Front thrust collar	Silicon carbide	–
Impeller wear ring	CFR*PTFE	Silicon carbide
Impeller magnet assembly	CFR*ETFE	PFA
Particulate control ring	CFR*ETFE	PFA
Shaft	Silicon carbide	–
Radial bearing	Graphite	Silicon carbide
Back thrust collar	CFR*PTFE	Silicon carbide
Containment shell (liner/housing)	CFR*ETFE/aramid vinyl ester	PFA/aramid vinyl ester
Outer magnet assembly (armor/magnets)	Ductile Iron/NdFeB	–
Casing O-ring	FEP with FKM core	FKM or EPDM
Containment ring	Ductile iron	–
Motor adapter	Ductile iron	–

*CFR = carbon fiber-reinforced

Range chart

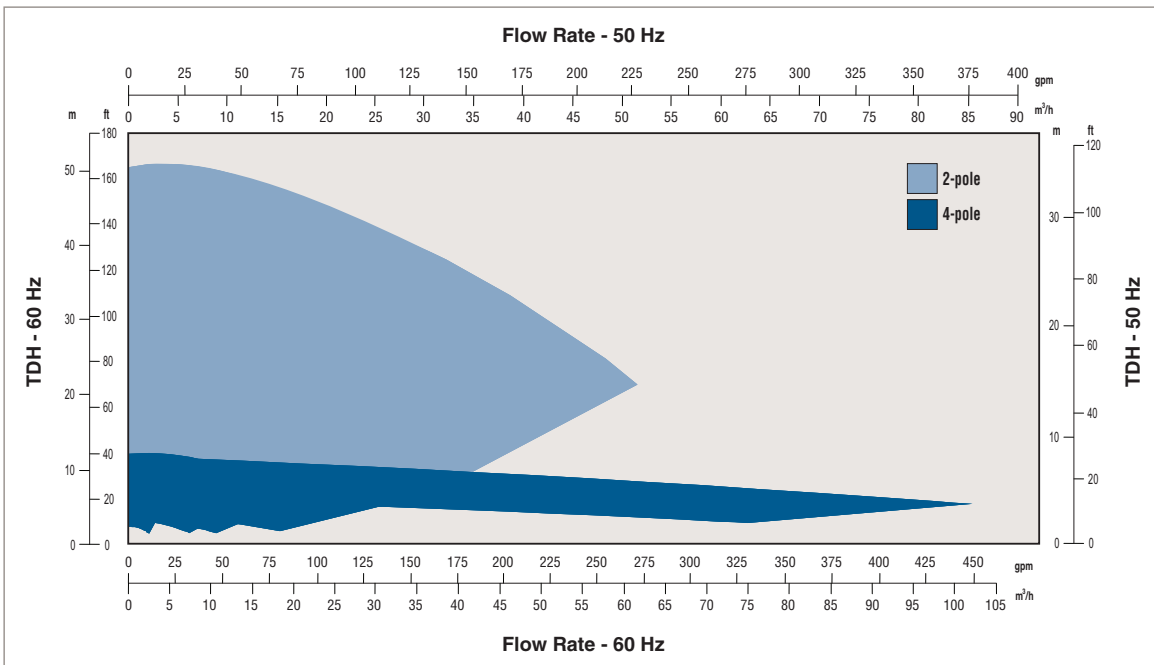



Flowserve Corporation
5215 North O'Connor Blvd.
Suite 2300
Irving, Texas 75039-5421 USA
Telephone: +1 937 890 5839

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

©2019 Flowserve Corporation. All rights reserved. This document contains registered and unregistered trademarks of Flowserve Corporation. Other company, product, or service names may be trademarks or service marks of their respective companies.

PS-10-37c (E/A4) January 2019