





***SIHI® ISOchem
Chemical Process Pumps
with Magnetic Drive***

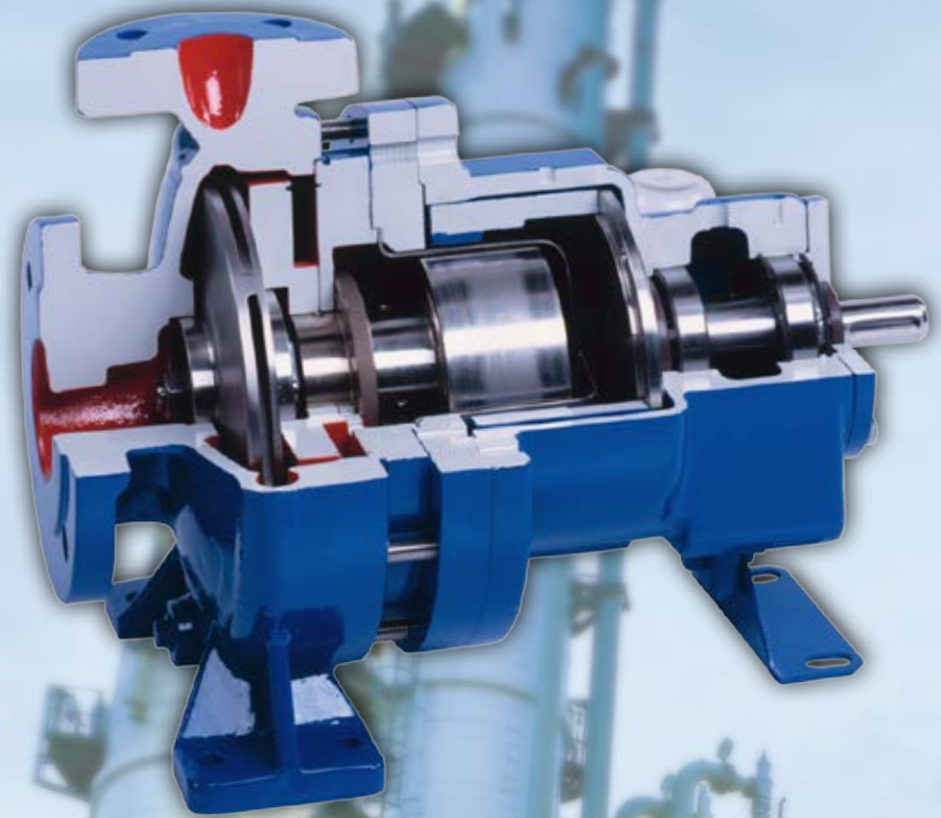

Experience In Motion

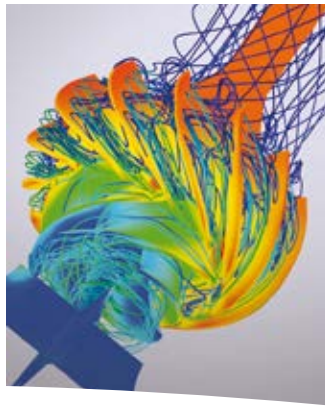

Pump Supplier to the World

Flowserve is the driving force in the global industrial pump marketplace. No other pump company in the world has the depth or breadth of expertise in the successful application of pre-engineered, engineered, and special purpose pumps and systems.

Life Cycle Cost Solutions

Flowserve provides pumping solutions that permit customers to reduce total life cycle costs and improve productivity, profitability and pumping system reliability.

Market-Focused Customer Support

Product and industry specialists develop effective proposals and solutions directed toward market and customer preferences. They offer technical advice and assistance throughout each stage of the product life cycle, beginning with the initial inquiry.

Broad Product Lines

Flowserve offers a wide range of complementary pump types, from pre-engineered process pumps to highly engineered and special purpose pumps and systems. Pumps are built to recognized global standards and customer specifications.

Pump designs include:

- Single-stage process
- Between bearings single-stage
- Between bearings multistage
- Vertical
- Submersible motor
- Positive displacement
- Vacuum & Compressor
- Nuclear
- Specialty

Product Brands of Distinction

ACEC™ Centrifugal Pumps

Aldrich™ Pumps

Byron Jackson® Pumps

Calder™ Energy Recovery Devices

Cameron™ Pumps

Durco® Process Pumps

Flowserve® Pumps

IDP® Pumps

INNOMAG® Sealless Pumps

Lawrence Pumps®

Niigata Worthington™ Pumps

Pacific® Pumps

Pleuger® Pumps

Scienco™ Pumps

Sier-Bath® Rotary Pumps

SIHI® Pumps

TKL™ Pumps

United Centrifugal® Pumps

Western Land Roller™ Irrigation Pumps

Wilson-Snyder® Pumps

Worthington® Pumps

Worthington Simpson™ Pumps



SIHI® ISOchem ... chemical process pumps

Today, chemical process pumps are used in a wide range of plants. Thanks to their reliability, they provide a high level of safety and reduced operating costs for the process industry.

Many application processes require specific types of shaft seals, such as single or double-acting mechanical seals or seal-less designs. These enable a greater range of applications and pump complexity as there are many individual designs available for even the most varied of applications.

The range of applications that chemical process pumps can be used for, as well as the specific technical standards they are required to adhere to as prescribed by e.g. ISO 5199, ISO 15783 and ISO 2858, mean that the pumps must be highly flexible in order to meet various application profiles.

Performance data

Capacity:	max. 650 m ³ /h (4403 US gpm)
Delivery head:	max. 160 m (525 ft)
Speed:	max. 3600 rpm
Casing pressure:	max. 25 bar (362 psi)
Temperature:	max. +400 °C (752 °F)

Industries /Markets

- Chemical
- Pharmaceutical
- Petrochemical
- Paper industry
- Food industry
- Plastics industry and many more ...

Typical Applications

- Filling
- Distillation
- Draining
- Extraction
- Product transfer
- Reaction
- Fuel storage
- Vaporisation
- Heat transfer

*SIHI® ISOchem
bare shaft or close-
coupled design*



*Hydraulic and
dimensions
according
to ISO 2858*

*Wear rings ensure
safety against failure*

*Maintenance free
sleeve bearings*

Alternative bearings for
fluids with low lubrication
properties

*High efficiency and
low NPSH*

Minimum Flow – continuous
operation at 10% of BEP

*L10h > 50,000 hours
bearing life time for
ball bearings*


*Secondary sealing as
an option*

*Design according
to ISO 5199*

Total hermetically sealed without
drain drillings in volute casing

*Long life and high
temperature magnets*

*Containment shell
options*

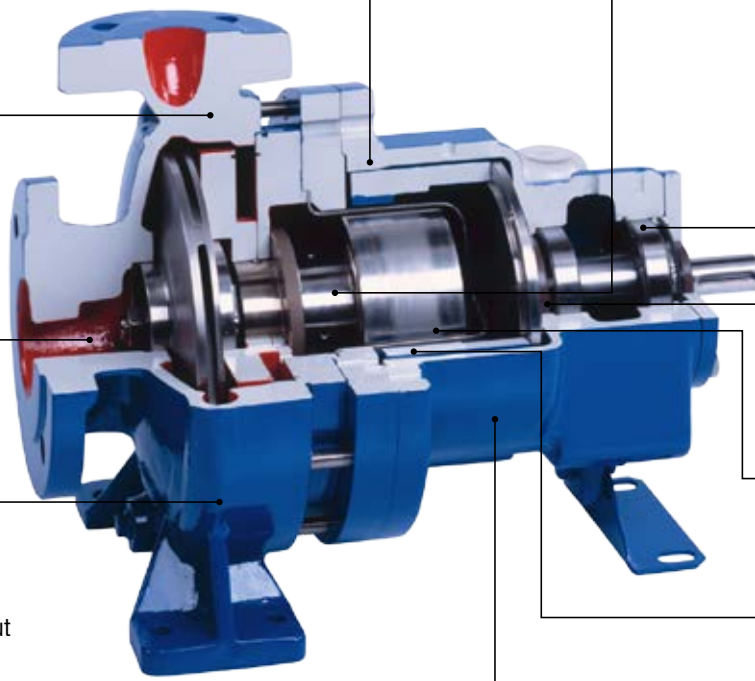

*Drop-in replacement for
mechanical sealed versions*

Materials

Volute casing:	ductile iron, stainless steel, duplex steel
Casing cover:	ductile iron, stainless steel, duplex steel
Shaft:	duplex steel
Impeller:	cast iron, stainless steel, duplex steel

**SIHI® ISOchem
Options**



Containment shells

Standard Hastelloy shells up to PN 25

- Up to temperatures of 300 °C

High efficiency Hastelloy shells up to PN 25

- Savings of eddy current losses approx. 40 %
- Increase coupling efficiency of approx. 5 %
- Up to temperatures of 180 °C

Coated (TiN) ceramic ZrO₂ shells up to PN 25

- No eddy current losses
- High fracture toughness, chemical abrasion and thermo-shock resistance
- Coating (TiN) allows ATEX certification

All containment shells are fully interchangeable with each other.

Secondary control system according to ISO 15783

In case of failure of primary pressure casing, a secondary sealing system reduces the leakage to atmosphere and gives the possibility to control the discharge and detect the failure.

Options

- Temperatures up to 400 °C (752 °F) without external cooling
- Special materials (Hastelloy, titanium, ...)
- Heating jackets
- Monitoring systems



Standard and high efficiency Hastelloy shells



Coated ceramic ZrO₂ shells



SIHI® ISOchem
with magnetic drive



Chemical process pumps in the SIHI® ISOchem range are horizontal, single-stage volute casing pumps with designs that fully meet the technical requirements of ISO 5199, ISO 15783 and dimensions according ISO 2858.

This process pumps consists of 30 hydraulics sizes designed with closed impeller. Due to the design, the pumps can be used in a bare shaft or close-coupled configuration.

Benefits

- Low power consumption
- Increased lifetime and longer maintenance intervals
- Low installation costs
- High level of availability and short supply times
- Simple assembly and dismantling
- Quick on-site servicing
- Can be used where there is a risk of explosion

Hydraulic



Volute casing with closed impeller


- Clean liquids
- Low NPSH values

With bare shaft back pull-out assembly




CBM with magnetic drive to ISO 15783

Close-coupled back pull-out assembly



CBE with magnetic drive to ISO 15783 for temperatures up to 300 °C (572 °F)



CBE with magnetic drive and heat barrier to ISO 15783 for temperatures up to 400 °C (752 °F)

**Global Service
and Technical
Support**



Life Cycle Cost Solutions

Typically, 90 % of the total life cycle cost (LCC) of a pumping system is accumulated after the equipment is purchased and installed. Flowserve has developed a comprehensive suite of solutions aimed at providing customers with unprecedented value and cost savings throughout the life span of the pumping system. These solutions account for every facet of life cycle cost, including:

Capital Expenses

- Initial purchase
- Installation


Operating Expenses

- Energy consumption
- Maintenance
- Production losses
- Environmental
- Inventory
- Operating
- Removal


Innovative Life Cycle Cost Solutions

- New Pump Selection
- Turnkey Engineering and Field Service
- Energy Management
- Pump Availability
- Proactive Maintenance
- Inventory Management

Typical Pump Life Cycle Costs¹

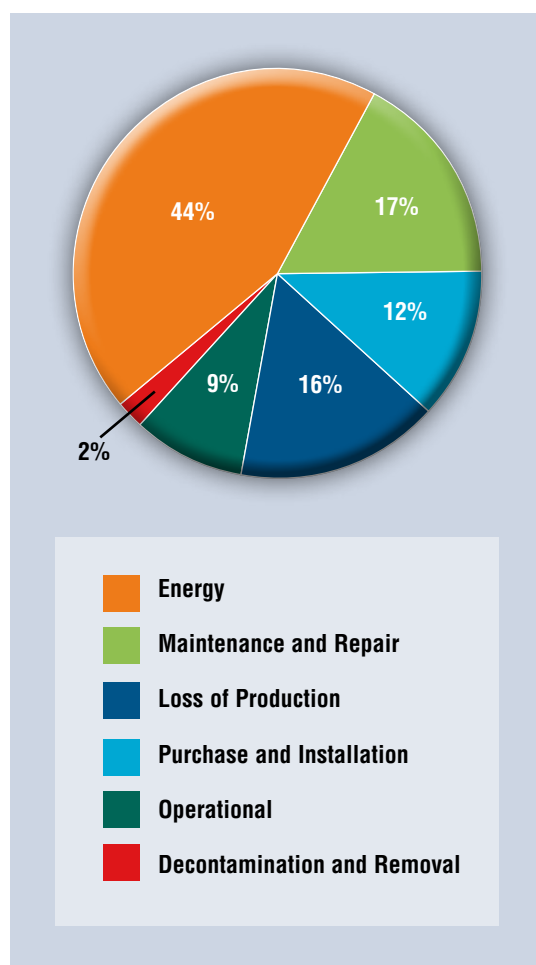

¹ While exact values may differ, these percentages are consistent with those published by leading pump manufacturers and end users, as well as industry associations and government agencies worldwide.

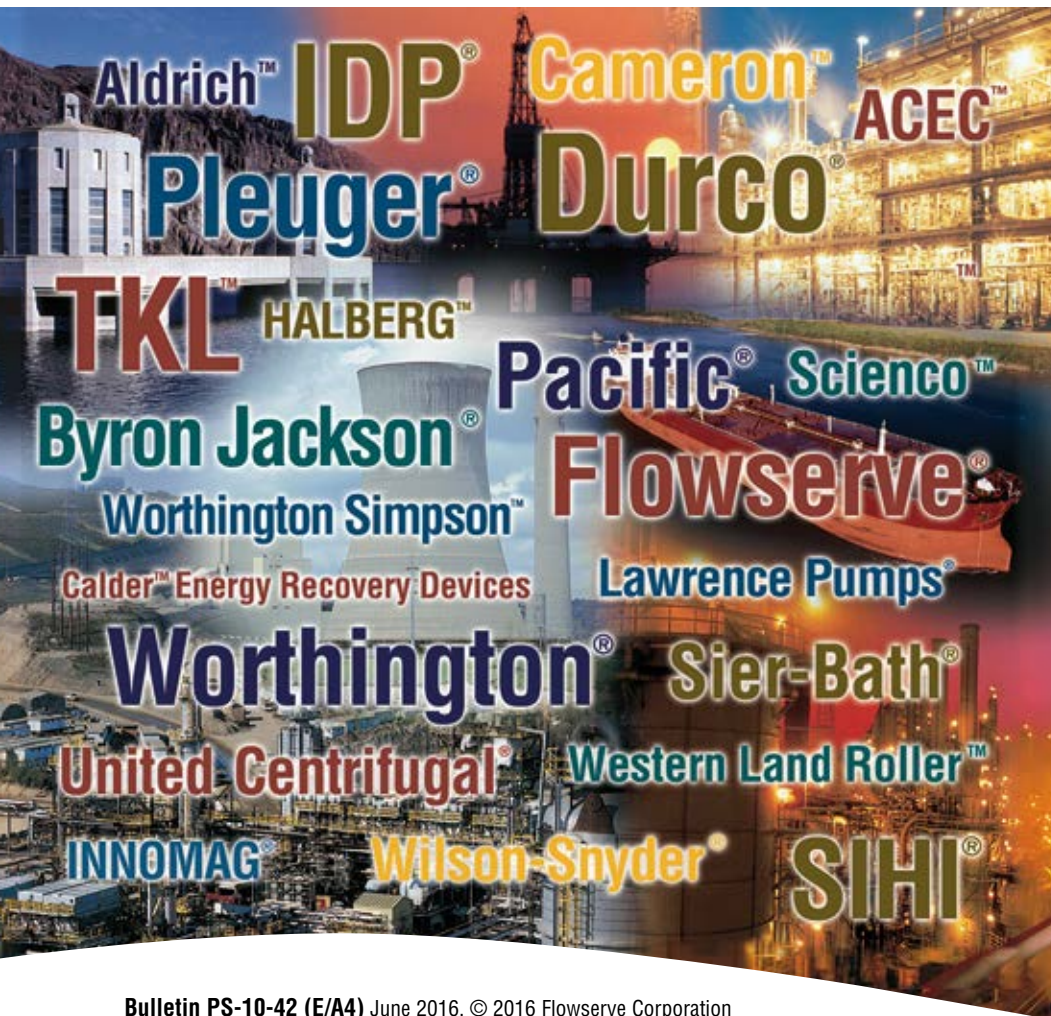

Bulletin PS-10-42 (E/A4) June 2016. © 2016 Flowserve Corporation

To find your local Flowserve representative:

For more information about Flowserve Corporation, visit www.flowserve.com or call +1 937 890 5839.

USA and Canada

Flowserve Corporation
5215 North O'Connor Blvd.
Suite 2300
Irving, Texas 75039-5421 USA
Telephone: +1 937 890 5839

Europe, Middle East, Africa

Flowserve Corporation
Parallelweg 13
4878 AH Etten-Leur
The Netherlands
Telephone: +31 76 502 8100

Latin America

Flowserve Corporation
Martín Rodríguez 4460
B1644CGN-Victoria-San Fernando
Buenos Aires, Argentina
Telephone: +54 11 4006 8700
Telefax: +54 11 4714 1610

Asia Pacific

Flowserve Pte. Ltd.
10 Tuas Loop
Singapore 637345
Telephone: +65 6771 0600
Telefax: +65 6862 2329